

DPR-1240-PNP-NC SW97


INSTALLATION OPTIONS

Installation options for the DAPRA DPR-1240-PNP-NC SW97 Area Sensor and light curtain system.

i DPR-1240-PNP-NC SW97 supports multiple installation methods to meet different application requirements.

1. VERTICAL MOUNTING (STANDARD)

Mount the light curtain vertically on the top and bottom with mounting brackets.

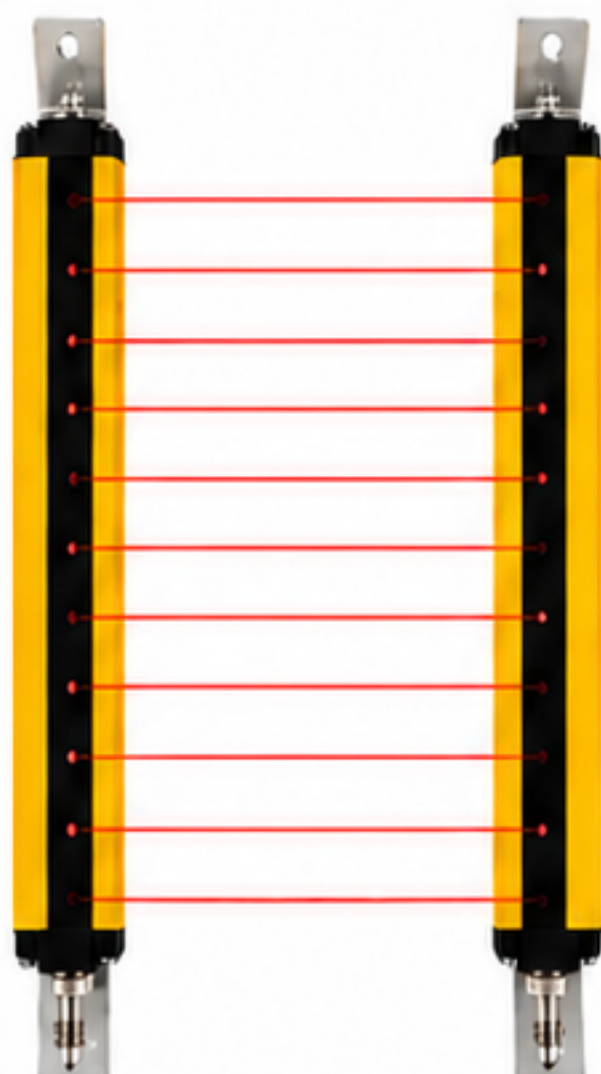

Top/Bottom Bracket

Fixed with L-shaped brackets at the top and bottom, suitable for most standard applications.

2. SIDE MOUNTING

Mount the light curtain on the side with side mounting brackets.



Side Mounting Bracket

Installed on the side using L-shaped brackets, ideal for space-constrained installation environments.

3. ADJUSTABLE BRACKET MOUNTING (OPTIONAL)

Use adjustable bracket system for flexible positioning and angle adjustment.



Adjustable Bracket System

Allows height and angle adjustment, suitable for complex installation scenarios.



NOTE: Ensure that the emitter and receiver are aligned properly and the optical axis is not blocked during installation. Recommended tightening torque for bracket mounting screws: 2.0 N·m.



**MACHINE
PROTECTION**



**FAST RESPONSE
<5 ms**



**SIL 2
CERTIFIED**



www.dappra.com